



Consumer and
Corporate Affairs Canada

Consommation
et Corporations Canada

(11) (A) No. 1 182 638

(45) ISSUED 850219

(52) CLASS 27-26
C.R. CL. 97-75;
214-40.1

(51) INT. CL. E02F 3/76

(19) (CA) **CANADIAN PATENT** (12)

(54) Tool Mounting Apparatus

(72) Caron, Ronald L.,
U.S.A.

(73) Granted to Valley Engineering, Inc.
U.S.A.

(21) APPLICATION No. 424,881

(22) FILED 830330

(30) PRIORITY DATE U.S.A. (428,107) 820929

No. OF CLAIMS 10

BEST AVAILABLE COPY

Canada

1182638

- 1 -

BACKGROUND OF THE INVENTION

This invention relates generally to devices of the type employed to mount and demount heavy duty tool components on vehicles. The invention is particularly adapted for, although not strictly limited in use to, the mounting of snow plows, scrapers, compactors, etc. on track-propelled vehicles of the type used for establishing and maintaining ski trails.

Such vehicles and their tool components are normally operated at high elevations on steeply sloped terrain, often under extremely adverse weather conditions, thus subjecting the tool mounting arrangements to heavy use accompanied by high stresses. The mounting arrangements must therefore be rugged and wear-resistant, for otherwise they will be subject to frequent breakdowns at locations where repairs are difficult, if not impossible to make. Moreover, there is often a need to rapidly and frequently interchange one tool component for another, and this also must be accomplished under the aforesaid adverse conditions.

In an attempt at dealing with these problems, some prior art tool mounting arrangements have evolved as relatively complex mechanisms. The problem with such mechanisms, however, is that they are either too fragile and thus susceptible to frequent breakdowns, or they are prohibitively expensive. Such mechanisms also experience rapid wear, with attendant loosening and rattling of their component parts. Other more simple arrangements have also evolved, but these require the manual coupling and uncoupling of component parts, which makes it difficult for operating personnel to rapidly interchange one tool for another.

SUMMARY OF THE INVENTION

A basic objective of the present invention is the provision of an improved tool mounting apparatus which



1182638

- 2 -

obviates or at least minimizes the problems experienced with prior art arrangements.

5 A more specific object of the present invention is the provision of a tool mounting apparatus which has a rugged simple design that is capable of withstanding the operating stresses experienced under adverse terrain and weather conditions.

10 Another object of the present invention is the provision of a tool mounting apparatus which can accommodate rapid interchangeability of tools, without the attendant need for manual coupling and uncoupling of component parts.

15 Still another object of the present invention is the provision of a tool mounting apparatus incorporating resilient means for compensating for the gradual wear of component parts, thereby insuring a tight rattle-free coupling of tools to the vehicle.

20 These and other objects and advantages of the present invention will be better understood as the description proceeds with the aid of the accompanying drawings, wherein:

BRIEF DESCRIPTION OF THE DRAWINGS

25 Figure 1 is a side elevational view of a tool mounting apparatus in accordance with the present invention as employed to detachably connect a snow plow blade to a track-propelled vehicle;

Figure 2 is a perspective view of the tool mounting apparatus shown separated from the snow plow blade;

30 Figure 3 is a side elevational view, partially in section, of the tool mounting apparatus at a first stage in the procedure employed to couple it to the plow blade;

Figure 4 is a view similar to Figure 3 showing the next stage in the coupling operation;

35 Figure 4A is a horizontal sectional view taken along line 4A-4A of Figure 4;

Figure 5 is another side elevational view showing the next stage in the coupling operation;

Figure 6 is another side elevational view showing the final stage in the coupling operation.

Figure 7 is an enlarged side elevational view, partly in section, illustrating the interengagement of the second engagement means with the second and third notch means; and

5 Figure 8 is an enlarged view showing the interengagement of the first notch means with the first engagement means, as well as details of the relationship between the contact means and the resiliently compressible pad means.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

10 Referring initially to Figure 1, a tool component in the form of a snow plow blade 10 is shown detachably mounted to the front end of a track-propelled vehicle 12 by means of a tool mounting apparatus generally indicated at 14. Referring additionally to Figures 2 and 3 which show the
15 blade 10 separated from the tool mounting apparatus and resting on the ground, it will be seen that the tool mounting apparatus includes a "frame component" 16 consisting essentially of front and rear horizontal box beams 16a, 16b which are pivotally joined together at 17, and which respec-
20 tively support somewhat triangularly shaped vertically upstanding front and rear plates 16c and 16d. The front and rear plates 16c, 16d are spaced apart at their upper ends by intermediate components 16e, which in turn underlie a cap piece 16f extending rearwardly from the front plate 16c. The
25 front beam 16a and its respective components is pivoted about connection 17 relative to the rear beam 16b by means of a piston-cylinder unit 15.

The frame component 16 is connected to the front end of the vehicle 12 by an intermediate "link means" generally indicated at 18, the latter being pivotally
30 connected to the rear side of the box beam 16b as at 20 and to the front end of the vehicle as at 22. The pivotal connection 20 establishes a horizontal first axis about which the frame component 16 may be inclined, as will be
35 described hereinafter in more detail.

A pair of brackets 24 are secured in a laterally spaced relationship to the front face of the box beam 16a. The brackets 24 are notched as at 26 to provide a "first

1182638

- 4 -

notch means" adapted to interengage with "first engagement means" consisting of pin members 28 extending laterally between brackets 30 secured to the back side of the snow plow 10.

5 A pair of locking arms 32 are fixedly interconnected by a sleeve 34 which is in turn rotatably mounted on an axle 36 establishing a second horizontal axis parallel to the first axis established by pivots 20. The axle 36 is supported between brackets 38 extending forwardly from the cap piece 16f. As can be best seen in Figure 3, the arms 32 are notched as at 40 to provide a "second notch means" adapted to interengage with a "second engagement means" in the form of a horizontal bar 42, the latter being supported between brackets 44 on the rear side of the plow blade 10, as is best shown in Figure 2.

15 A "first operating means" includes a crank arm 46 extending laterally from the sleeve 34. The crank arm 46 is pivotally connected as at 48 to the piston rod 49 of a linear actuator in the form of a hydraulic ram 50. The ram cylinder is pivotally connected as at 52 to brackets 54 supported on the front box beam 16a of the frame component 16.

20 Extension and retraction of the piston rod 49 of ram 50 will result in the locking arms 32 being adjusted between an unlocked position at which the notches 40 open in a forward direction transverse to the downwardly open direction of the notches 26 of the lower brackets 24, and a locked position at which their notches 40 open in an upward direction generally opposite to that of the downwardly open notches 26 as shown for example in Figures 6 and 7.

30 A pair of resiliently compressible pads 56 is located on the front side of the box beam 16a. These pads, which can conveniently comprise commercially available rubber bumpers, are secured to mounting plates 58 welded to the top of the box beam 16a. The pads 56 are removably attached to their respective plates by any convenient means such as for example the bolts 60 shown in Figure 8, thus facilitating their replacement after normal wear has taken place. The compressible pads 56 are adapted to be compressed.

1182638

- 5 -

sively engaged by "contact means" in the form of shelf-like plates 62 which protrude rearwardly from the snow plow blade 10.

5 A pair of vertically protruding plates 64 are mounted on the top of the frame cap 16f. The plates 64 are notched as at 66 and as such define "third notch means".

10 A "second operating means" consisting of hydraulic rams 68 and 70 operates in conjunction with the movement of the vehicle 12 to adjust the position of the frame component 16. The hydraulic ram 68 is pivotally connected to the frame component 16 as at 72 and to the vehicle at 74. Similarly, the hydraulic ram 70 is pivotally connected to the link means 18 as at 76 and to the vehicle as at 78.

15 When attaching a tool component such as the snow plow blade 10 to the vehicle, the frame component 16 is first brought to a "first position" as shown in Figure 3. This is accomplished by moving the vehicle 12 to a desired location and by adjusting the elevation of the frame component through appropriate operation of the rams 68, 70. At this
20 first position, the locking arms 32 have been rotated to their unlocked position, with their notches 40 facing the horizontal bar 42 on the plow blade. The lower horizontal edges of the notches 40 extend forwardly of the frame component and are spaced below the level of bar 42. Any
25 inclination of the plow blade and its bar 42 can be compensated for by operating the piston-cylinder unit 15 to incline the front beam 16a and its associated components to an appropriate angle. The vehicle 12 is then advanced towards the blade 10 to a point where the horizontal bar 42 is
30 received in the notches 40 of the locking arms 32. Thereafter, the hydraulic rams 68, 70 are operated to elevate the frame component to a "second position" as shown in Figure 4. At this second position, the plow blade 10 is suspended from the frame component 16 by virtue of the interengagement of
35 the horizontal bar 42 within the notches of the locking arms 32. At this stage, the lower pin members 28 are spaced forwardly of the notched brackets 24, and the contact plates 62 are similarly spaced forwardly of the compressible pads 56.

1182638

- 6 -

The hydraulic ram 68 is next operated to rearwardly incline the frame component 16 about the horizontal axis defined by pivot points 20 to an "elevated inclined third position" as shown in Figure 5. This has the effect of swinging the lower portion of the plow blade towards the lower portion of the frame component until the lower pin members 28 rest against the bracket 24, thus aligning the pin members with the notches 26. At this stage, the contact plates 62 also are aligned with but spaced below the compressible pads 56.

The hydraulic ram 50 is then operated to rotate the locking arms 32 to the locked position shown in Figure 6. As the arms 32 rotate, the interengagement of the horizontal bar 42 and the surfaces of the notches 40 causes the blade 10 to move upwardly in relation to the frame component 16 until the bar 42 is securely confined within the notches 40 and 66 between the locking arms 32 and the vertically protruding top plates 64. As this is occurring, the lower pin members 28 are being pulled up into the notches 26 and the contact plates 62 are being drawn into compressible engagement with the pads 56.

In the final locked position, as can be best seen by a combined reference to Figures 7 and 8, the horizontal bar 42 has been moved "over center" by a distance "X", thus establishing a self-locking engagement within the notches 40, 66. The contact plates 62 are in compressible engagement with the pads 56, and the lower pins 28 are confined within the notches 26, there being a small clearance "c" between the pins 28 and the bases of the notches 26.

It will thus be seen that the plow blade 10 is now securely held to the frame 16, with the resilience of the compressible pads 56 acting to compensate for any clearances that might otherwise exist as a result of normal wear of components such as the arms 32, the bar 42, etc. This results in a secure yet rattle-free connection.

The rams 50, 68, 70 are all controllable by known means (not shown) from the vehicle cab. Thus, the vehicle operator can perform the entire mounting sequence without

leaving the vehicle cab and without having to manually engage component parts. When detaching the blade from the frame component, the above sequence is simply reversed.

5 In light of the foregoing, it will now be appreciated by those skilled in the art that minor modifications may be made to the disclosed embodiment without departing from the spirit and scope of the invention. For example, under certain circumstances it may be desirable to reverse the locations of certain cooperating parts. Thus, it might
10 be considered advantageous to locate the compressible pads 56 on the plow blade and the plate members 62 on the frame component. Similar reversals could be achieved with the brackets 24 and pin members 28.

1182638

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. Apparatus for detachably connecting a tool
component to a vehicle, comprising:

a) a frame component;

b) link means connecting said frame
component to the vehicle, said link
means being adapted to accommodate
adjustment of said frame component both
vertically and angularly about a
horizontal first axis;

c) first notch means fixedly mounted on one
of said components and adapted to
interengage with first engagement means
on the other of said components;

d) second notch means adjustably mounted on
one of said components and adapted to
interengage with second engagement means
on the other of said components;

e) first operating means for adjusting said
second notch means between an unlocked
position opening in a direction transverse
to the opening direction of said first notch
means, and a locked position opening in a
direction opposite to that of said first
notch means;

f) resiliently compressible pad means on one
of said components adapted to be compressively
engaged by contact means on the other of

1182638

said components; and

- g) second operating means operable in conjunction with vehicle movement for adjusting said frame component between:

5 (i) a first position at which said components are spaced apart and said second notch means, in its unlocked position, is facing said second engagement means, thereby
10 permitting the vehicle together with said frame component to be advanced towards said tool component until said second notch means and said second engagement means inter-
15 engage with each other; and

(ii) an elevated inclined second position at which the tool component is suspended on said frame component, with said first engagement means
20 and said contact means being respectively aligned with and spaced below said first notch means and said resiliently compressible pad means;

- h) said second notch means being operative upon
25 adjustment to its locked position to cause movement of said components relative to each other, resulting in said first engagement means entering into interlocked engagement with said first notch means, with an

1182638

accompanying compressive engagement of
said contact means against said resilient-
ly compressible pad means.

2. The apparatus of claim 1 wherein first notch
5 means is fixedly mounted on said frame component, and said
first engagement means is located on said tool component.

3. The apparatus of claim 1 wherein said second
notch means is mounted on said frame component and said
second engagement means is located on said tool component.

10 4. The apparatus of claims 1, 2 or 3 wherein said
resiliently compressible pad means is located on said frame
component, and said contact means is located on said tool
component.

15 5. The apparatus of claim 1 wherein said second
notch means is rotatable about a horizontal axis between
said locked and unlocked positions, and wherein said
first operating means comprises a linear actuator pivotally
connected at opposite ends to said second notch means and
its respective supporting component.

20 6. The apparatus of claim 1 wherein the adjustment
of said frame component between said second and third
positions occurs about a first horizontal axis, and
wherein said second notch means is rotatably adjusted
between said locked and unlocked positions about a second
25 horizontal axis which is parallel to said first horizontal
axis.

1182638

7. The apparatus of claim 1 further comprising a third notch means in which said second engagement means is seated by adjustment of said second notch means to its locked position.

5 8. The apparatus of claim 1 wherein said first and second notch means are located at vertically spaced levels on said frame component, with said resiliently compressible pad means also being located on said frame component at a level between the levels of said first and
10 second notch means.

 9. The apparatus of claim 7 wherein when said second notch means is adjusted to its locked position, said second engagement means is firmly confined between said second and third notch means, said contact means is
15 in compressive engagement with said pad means, and said first engagement means is received in but spaced from the base of said first notch means.

 10. Apparatus for detachably connecting a tool component to a vehicle or the like, comprising:
20 a mounting frame;
 link means connecting said mounting frame to the vehicle, said link means being adapted to accommodate adjustment of said mounting frame relative to the vehicle
25 both vertically and angularly about a horizontal first axis;

1182638

downwardly facing fixed lower notch means on
said mounting frame;

an arm member mounted on said mounting frame for
rotation about a horizontal second axis,

5 said arm member defining upper notch means;

first operating means for rotating said arm

member about said second axis between an
unlocked position at which said upper notch
means faces towards the front of said mount-
10 ing frame, and a locked position at which
said upper notch means faces upwardly in a
direction generally opposite to that of
said lower notch means;

resiliently compressible pads on said mounting
15 frame;

upper and lower engagement means and contact
means on the tool component;

second operating means for vertically adjusting

said mounting frame to a level such that
20 with said arm member in its unlocked position,
the base of said upper notch means is below
the level of said upper engagement means,
thereby permitting the vehicle together with
said mounting frame to be advanced to a first
25 position at which the base of said upper
notch means underlies said upper engagement
means and said lower engagement means is
spaced forwardly of and below said lower
notch means,

1182638

said second operating means being further
operable to rearwardly tilt said mounting
frame about said first axis from said first
position to a second position at which said
5 lower engagement means and said contact
means respectively underlie said lower
notch means and said pads;

whereupon said first operating means then may
be employed to rotate said arm member to
10 said locked position, the said rotation
causing said tool component to move
upwardly relative to said frame to a third
position at which said contact means
compressively engage said pads and said
15 lower engagement means is received in
said lower notch means.

1182S38

5-1


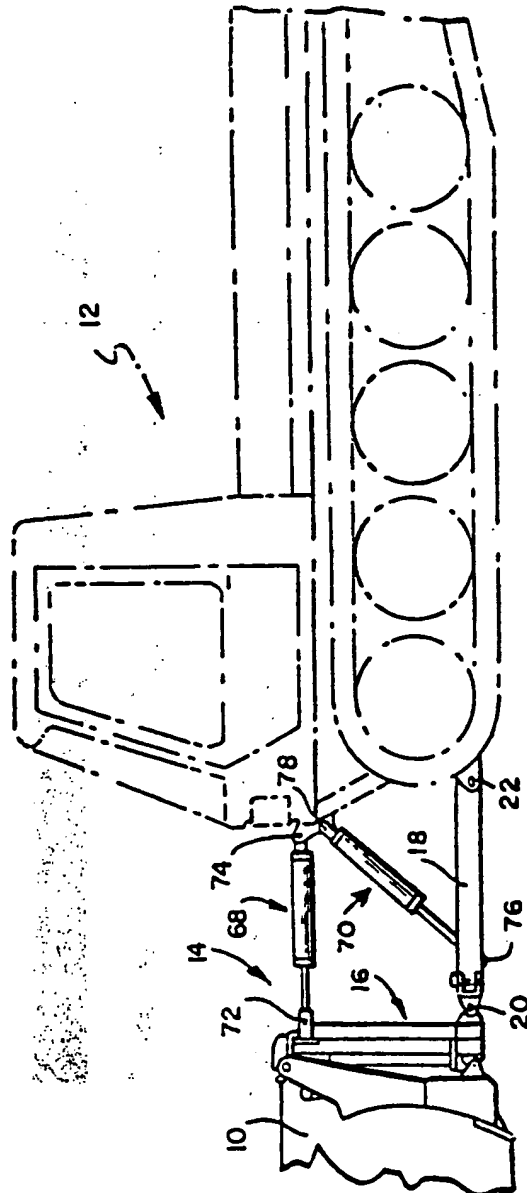


FIG. 1

1152638

5-2

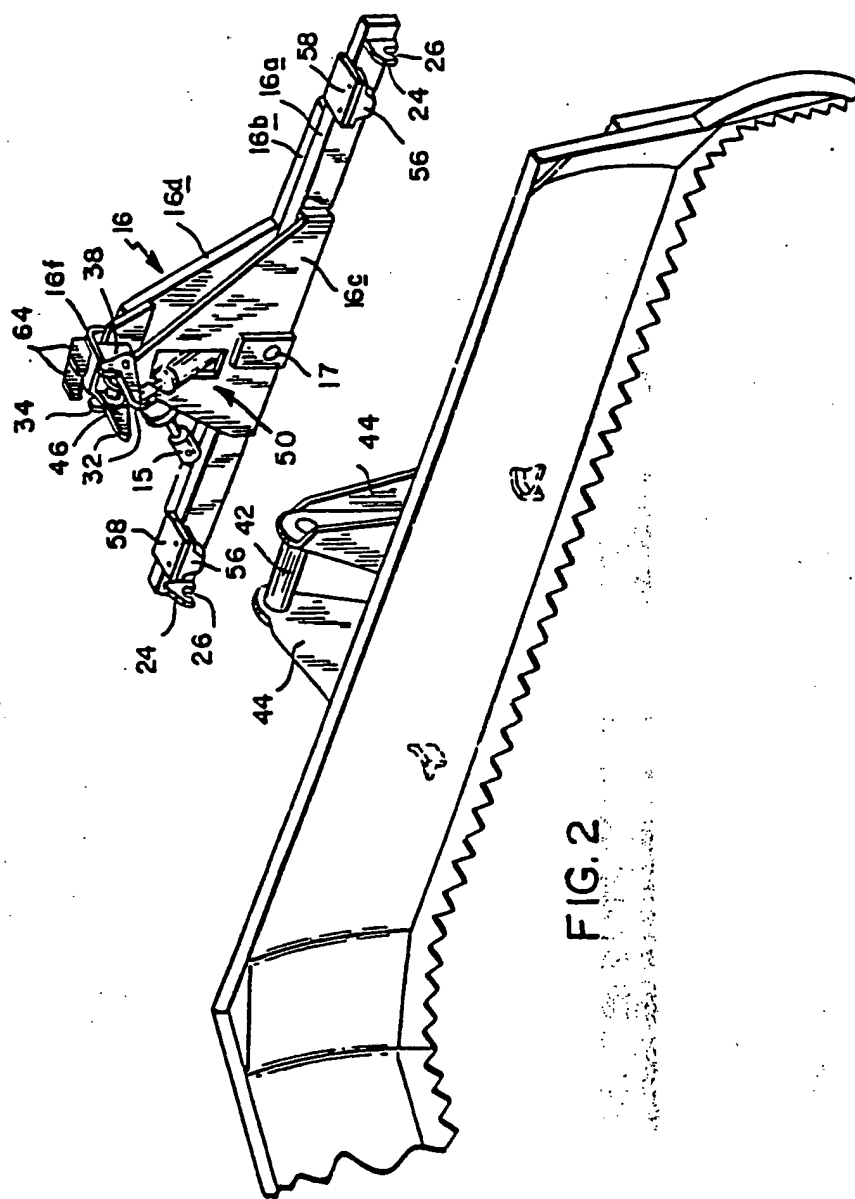

1182638

5-3"

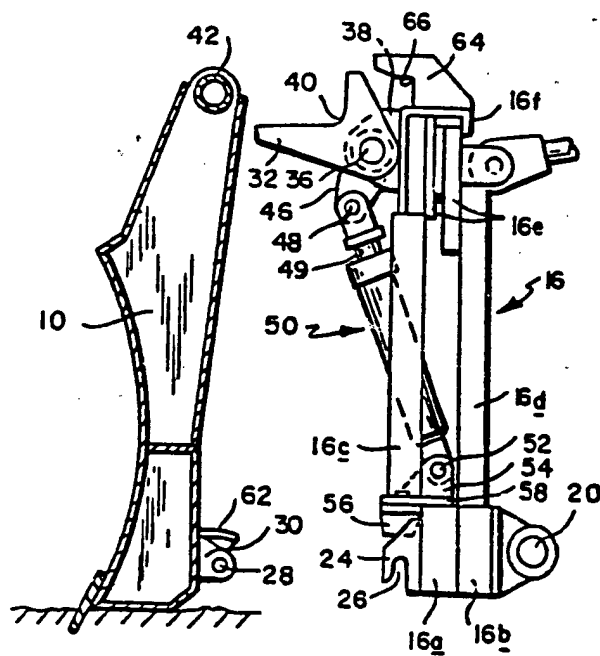


FIG. 3

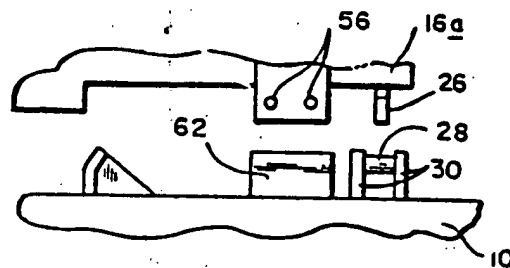


FIG. 4A

1182638

5-4

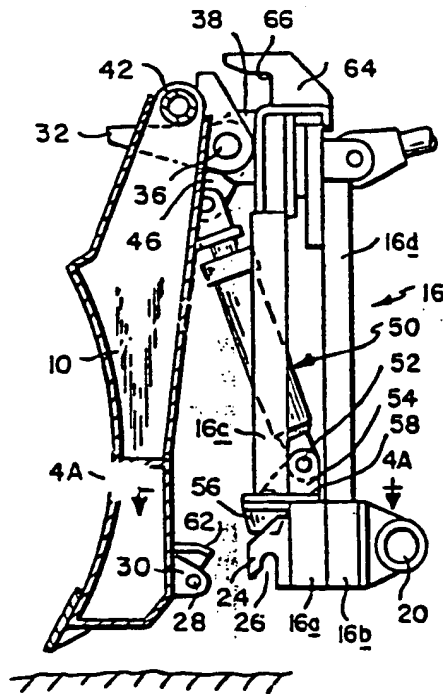


FIG. 4




FIG. 8

1182638

5-5

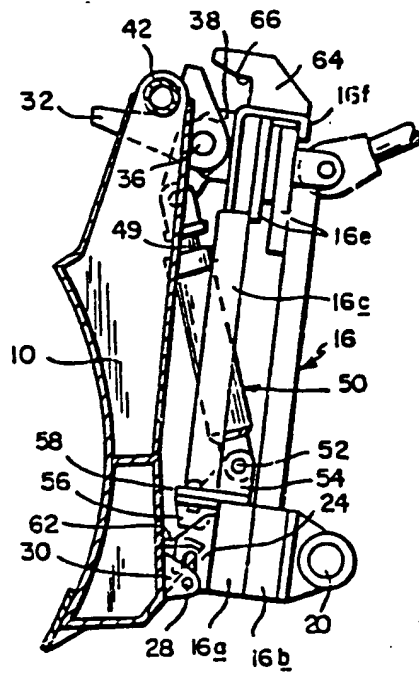


FIG. 5

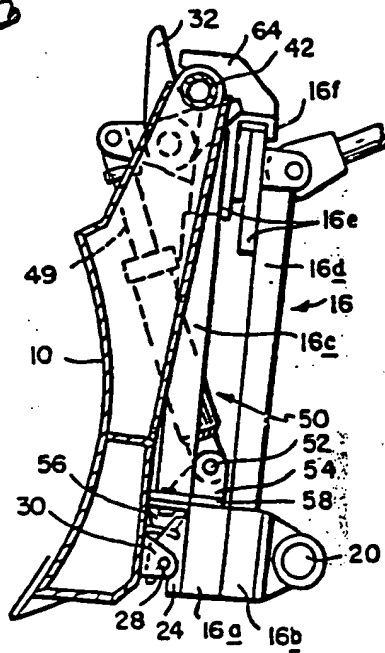


FIG. 6

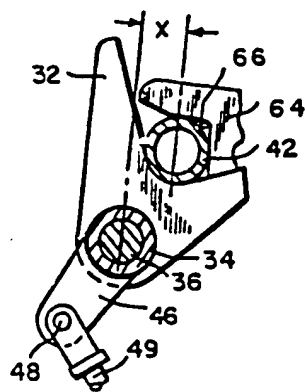


FIG. 7

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.